

Alyria

Viseća rasvjeta
Light in levitation



Alyria

Urbane šetnice
Urban promenades

Inspirirana Atinia modelom, Alyria predlaže verziju sa strujnim krivuljama. Diskretnim pozicioniranjem dvaju držača na pozadini postiže se određena svjetlina čime se izbjegava bilo kakvo ometanje svjetlosnog toka. Kombinirajući fotometrijsku učinkovitost s približnim svjetlosnim onečišćenjem od 0%, Alyria je savršen izbor za niskobudžetne rasvjetne sustave, nudeći alternativu difuznim svjetiljkama.

Alyria proposes a version with streamlined curves. The discreet positioning of the two arms at the rear gives this model a certain lightness while avoiding any interruption of the stream of light. Combining real photometric efficiency with light pollution close to 0 %, Alyria is the perfect choice for low-level compositions, offering an alternative to ball street lamps.





Alyria



Istaknute značajke

- Kućište od tlačno lijevanog aluminija
- Asimetrični reflektor posljednje generacije
- Bezalatno održavanje
- Prozračan dizajn
- Mogućnost kombiniranja boja držača/kućišta (za stvaranje originalnih cjelina)
- Vrlo nisko svjetlosno onečišćenje
- Ekološki prihvatljivi materijali



Highlights

- *Injected cast aluminium fixture*
- *Last generation asymmetrical reflector*
- *Tool-free maintenance*
- *Airy design*
- *Possibility of mixing yoke/fixture colors (to create original ensembles)*
- *Very low light pollution*
- *Environment friendly materials*



Tehnička svojstva

Materijali

Kućište: Tlačno lijevani aluminij

Držač: Lijevani aluminij

Reflektor: Savijeni sjajni tretirani aluminij

Zaštita: Kaljeno staklo

Oblik zaštite

Vrsta: Ravan

Izvedba zaštite

Vrsta: Prozirno

Optika

Vrsta: Asimetrični cestovni reflektor ili OPTICALED evo

Priključak: Kolnik

Maksimalna snaga

VTN/MH: 250 W

Cosmo: 140 W

OPTICALED evo: 30 LED @ 1050 mA

Montaža



Technical characteristics

Materials

Fixture: Injected cast aluminium

Yoke: Cast aluminium

Reflector: Pressed bright dipped aluminium

Protection: Tempered glass

Protection Shape

Standard: Flat

Protection Finish

Standard: Transparent

Optical

Type: Asymmetrical road reflector or OPTICALED evo

Socket side: Roadway

Maximum Power

HPS/MH: 250 W

Cosmo: 140 W

OPTICALED evo: 30 LED @ 1050 mA


Mounting

Alyria

Urbane šetnice
Urban promenades

✱ **Klasa zaštite**
1 i 2

✱ **Electrical class**
1 and 2

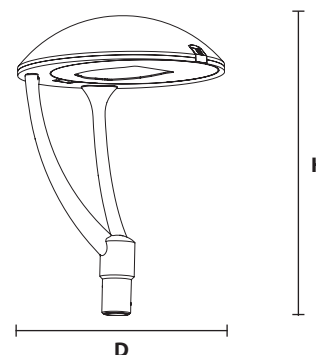

**Alyria
6600**

Težina (kg) / Weight (kg) 15

Aerodinamicki koeficijent CxS (m²) 0.08
Aerodynamic coefficient CxS (m²)

Stupanj mehaničke zaštite

Protection index
Optička jedinica IP 66
Optical unit
Električno kućište IP 66
Electrical compartment

Otpornost na udar IK 08
Shock resistance

Dimenzije (mm)
Size (mm)

D H
600 870



+ Bezalatna kuka za otvaranje
Tool-free opening hook




+ Dvostruki IP66 zahvaljujući
zaštitnom kućištu priključka
*Double IP66 thanks to socket
support cap*



+ Nagib 3°
3° tilt

Atilea

Suptilni ugođaj
A subtle mood

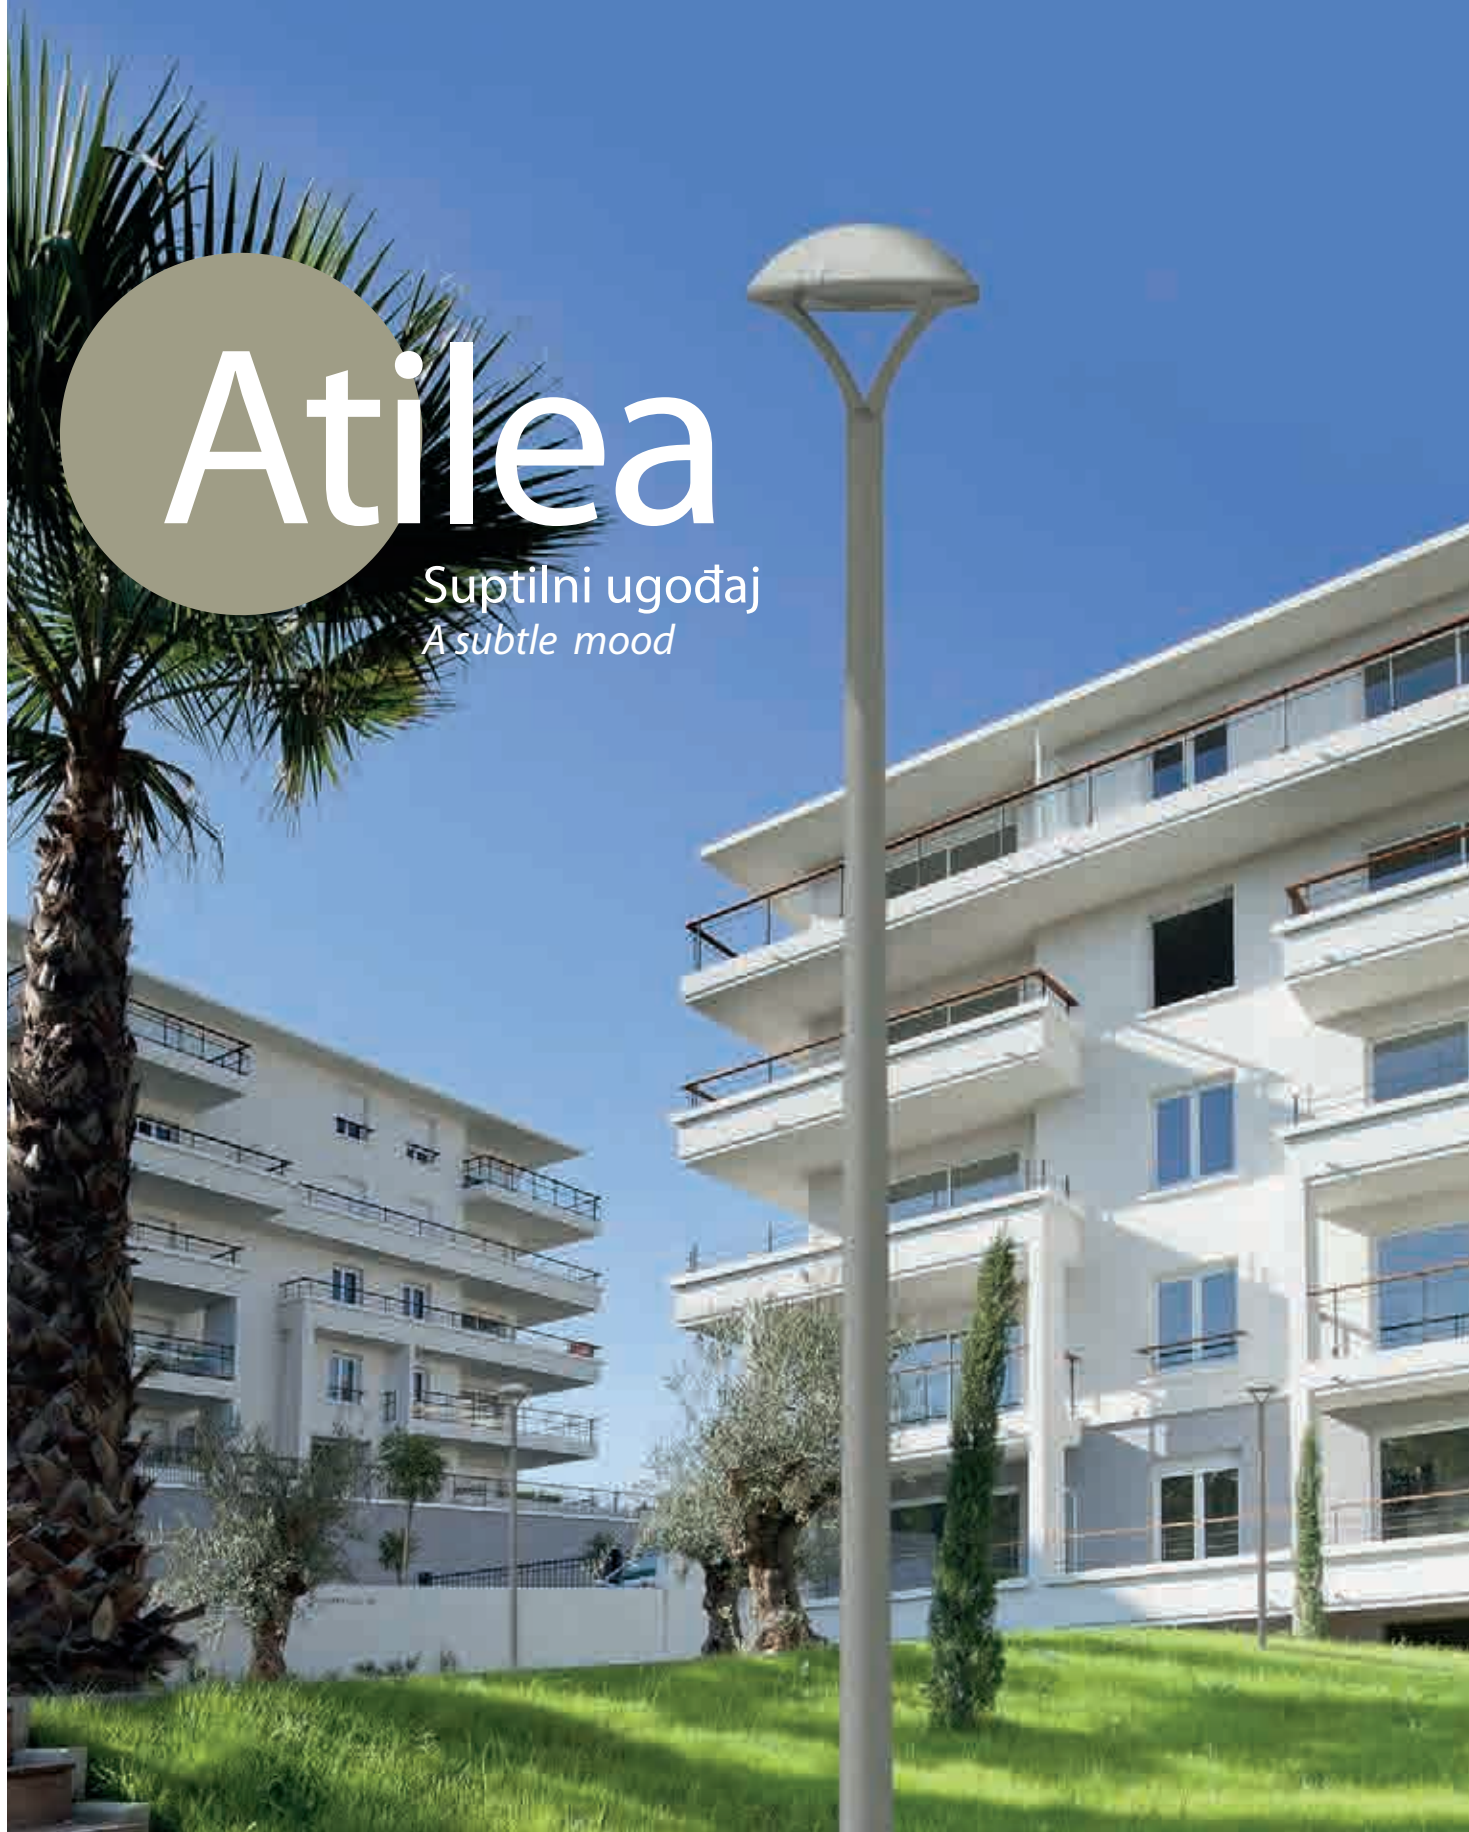

Atilea

Urbane šetnice
Urban promenades

Sasvojim mekim i harmoničnim konturama Atilea ističe lagan i prozračan izgled, uz tehničke značajke na koje može biti samo ponosna. Kao idealna i trenutna zamjena za difuzijske kugle (s brzo i jednostavnom montažom na stup), stapa se sa smirujućim ambijentom stambenih četvrti i parkova. Atilea je zamjensko rješenje koje se temelji na zdravom razumu.

With its soft, harmonious lines, Atilea stands out for its light and airy presence with technical features of which it can be proud. An ideal and immediate replacement for ball street lamps (with fast and simple installation on the mast), it blends with self-evidence into the tranquil ambience of residential areas and parks. The Atilea model is clearly a common-sense solution for replacement needs.





Atilea



Istaknute značajke

- Vrlo brza mogućnost zamjene
(Električni priključci mogu se zadržati bez dodatnog montažnog pribora - npr.. zamjena difuzijskih svjetiljki...)
- Prethodno ožičena svjetiljka (s 4 m ožičenja)
- Otvaranje i održavanje bez alata
- Jednostavna instalacija na vrhu stupa
- Asimetrični reflektor posljednje generacije
- Prozračan dizajn
- Mogućnost kombiniranja boja držača/kućišta
- Zanemarivo svjetlosno onečišćenje
- Otvor IP 68. Vodootporan sustav ventila za protok zraka



Tehnička svojstva

Materijali

Kućište: Tlačno lijevani aluminij

Držač: Tlačno lijevani aluminij

Reflektor: Savijeni sjajni tretirani aluminij

Zaštita: Kaljeno staklo

Oblik zaštite

Vrsta: Ravan

Izvedba zaštite

Vrsta: Prozirno

Optika

Vrsta: Asimetrični cestovni reflektor

OPTICALED evo

Simetrični reflektor za fortimo

Priključak: Kolnik

Maksimalna snaga

VTN/MH: 100 W

Cosmo: 90 W



Highlights

- Product that can be replaced immediately
(Electrical connections can be retained without additional mounting accessories - eg. replacement of ball street lamps...)
- Pre-wired luminaire (with 4m of wiring)
- Tool-free opening and maintenance
- Simple, harmonious installation on top of a pole
- Last generation asymmetrical reflector
- Airy design
- Possibility of mixing yoke/fixture colors
- Very low light pollution
- IP 68 VENT. Waterproof vent system, allowing air flow



Technical characteristics

Materials

Fixture: Injected cast aluminium

Yoke: Injected cast aluminium

Reflector: Pressed bright dipped aluminium

Protection: Tempered glass

Protection Shape

Standard: Flat

Protection Finish

Standard: Transparent

Optical

Type: Asymmetrical road reflector

OPTICALED evo

Symmetrical reflector for fortimo

Socket side: Roadway

Maximum Power

HPS/MH: 100 W

Cosmo: 90 W

Atilea

Urbane šetnice
Urban promenades

☼ **Klasa zaštite**
1 i 2

☼ **Electrical class**
1 and 2




+ Dvostruki IP66
Double IP66



+ Sigurnosno otvaranje vrata/
Opening door security



+ Dvostruka spojnica
Double hinge



Atilea

Težina (kg) / Weight (kg) 7.5

Aerodinamicki koeficijent CxS (m²) 0.06
Aerodynamic coefficient CxS (m²)

Stupanj mehaničke zaštite

Protection index
Optička jedinica IP 66
Optical unit
Električno kućište IP 66
Electrical compartment

Otpornost na udar IK 08
Shock resistance

Dimenzije (mm)
Size (mm)

D **H**
480 494

28



Urbane

Urbane

Urbane šetnice
Urban promenades

Sa svojim istaknutim eteričnim linijama, Urbane izgleda poput padobrana koji lebdi u zraku. Moderna i tradicionalna u isto vrijeme, ovaj ukrasni model reinterpreтира četverostrano ulično svjetlo, dok je osigurana visoka razina funkcionalnosti. Ova svjetiljka nudi nekoliko konfiguracija (na vrh postavljena ili obješena svjetiljka, s ili bez držača) i stvara dodir fantazije: dekorativni bijeli stožac u središtu držača za postizanje svjetlosnog efekta.

Omogućavanjem lake prilagodbe Urbane svjetiljke njenom okruženju, različite značajke takođe igraju svoju ulogu u pružanju raznih mogućnosti za svjetlosne aranžmane, od klasičnih do najsuvremenijih.

With its suave ethereal lines, Urbane is like a parachute floating in the air. Modern and traditional at the same time, this decorative model reinterprets the four-sided street light of character while ensuring a high level of functionality.

It offers several configurations (top-mounted or suspended, with or without arms) and adds a touch of fantasy: a decorative white cone in the centre of the arms, to give a lighting effect.

Enabling Urbane to adapt easily to its environment, these various features also play their part in offering many possibilities for lighting arrangements, from the most classic to the most contemporary.





Urbane

Istaknute značajke

- Dostupnost u različitim konfiguracijama: 4 držača / ugradnja na vrhu ili viseća rasvjeta bez držača
- Regulacija tlaka zraka pomoću otvora
- Vrlo praktična kuka za bezalatno otvaranje
- Kompatibilna s Led modulom ili opremljena asimetričnim ili kružnim reflektorom
- Bijeli dekorativni detalj u središtu držača

Highlights

- Available in different configurations: 4 arms/ top mounted, suspended or suspended without arms.
- Vent regulating internal air pressure
- Very practical tool-free opening hook
- Compatible with LED module or fitted with equipped with asymmetrical or circular reflector
- White decorative cone at the heart of arms

Tehnička svojstva

Materijali

Kućište: Tlačno lijevani aluminij
Reflektor: Savijeni sjajni tretirani aluminij
Zaštita: Kaljeno staklo

Oblik zaštite

Vrsta: Ravan

Izvedba zaštite

Vrsta: Prozirno

Optika

Vrsta : Asimetrični reflektor (okrugli na zahtjev)
ili OPTICALED evo
Priključak: Kolnik

Maksimalna snaga

VTN/MH: 150 W
Cosmo: 140 W
OPTICALED evo: 30 LED @ 1050 mA

Montaža

Na vrh: Ø60

Technical characteristics

Materials

Fixture: Injected cast aluminium
Reflector: Pressed bright dipped aluminium
Protection: Tempered glass

Protection Shape

Standard: Flat (screen printing)

Protection Finish

Standard: Transparent

Optical

Type: Asymmetrical reflector (circular on request)
or OPTICALED evo

Socket side: Roadway

Maximum Power

HPS/MH (high pressure sodium): 150 W

Cosmo: 140 W

OPTICALED evo: 30 LED @ 1050 mA

Mounting

Top mounted: Ø60

Urbane

Urbane šetnice
Urban promenades

☼ **Klasa zaštite**
1 i 2

☼ **Electrical class**
1 and 2




+ Bezalatna kuka za otvaranje/
zatvaranje
Tool-free hook opening/closing



+ Ukasni bijeli šiljak
Decorative white cone



+ Pristup svjetiljci i aparaturi
Lamp and control gear access

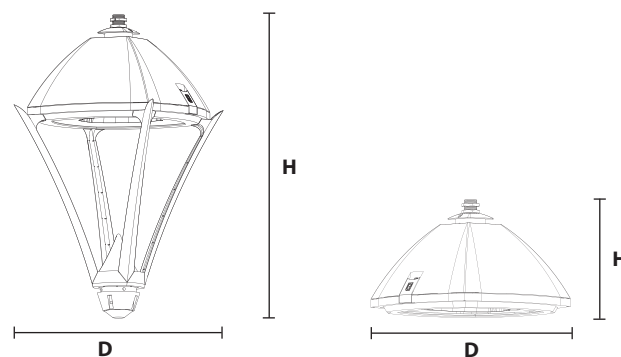

Urbane Urbane C

Težina (kg) / Weight (kg).....10.5.....7.9

Aerodinamicki koeficijent CxS (m²).....0.10.....0.08
Aerodynamic coefficient CxS (m²)

Stupanj mehaničke zaštite

Protection index

Optička jedinica.....IP 66.....IP 66

Optical unit

Električno kućište.....IP 66.....IP 66

Electrical compartment

Otpornost na udarIK 08 IK 08

Shock resistance

Dimenzije (mm)

Size (mm)

D	H	D	H
480	800	480	300



Danis

Uspješna kombinacija!
A successful combination !

Danis

Urbane šetnice
Urban promenades

Elegancija čistih linija u kombinaciji s rješenjima ispunjava zahtjeve stambene rasvjete te osigurava jamstvo uspjeha Danis modela.

Njegovo difuzno svjetlo i iznimna robusna tehnologija nudi vizualnu privlačnost idealnu za stvaranje ugodnog i umirujućeg okruženja.

Njegova svojstva čine ga savršenim rješenjem za poboljšanje karaktera zgrada čuvajući mirnu atmosferu.

The elegance of its pure lines combined with a solution meeting the demands of residential lighting guarantee the success of the Danis model.

Its diffused light and extremely robust technology offer visual appeal ideal for creating pleasant and soothing ambiances.

Its characteristics make it a perfect partner for enhancing buildings of character while preserving a serene atmosphere.





Danis

Istaknute značajke

- Difuzna rasvjeta
- Rezidencijalni model
- Elegantan dizajn
- Opremljen s rasporom od nehrđajućeg čelika (za smanjenje blještavila i pojačanje svjetlosti na razini poda)
- Jednostavnost održavanja zbog raspora opremljenog izravno na pristupnom poklopcu

Highlights

- Diffused lighting
- Residential model
- Elegant design
- Fitted with a stainless steel louver (to reduce glare and intensify the light at ground level)
- Ease of maintenance due to the louver assembly fitted directly on the access hatch

Tehnička svojstva

Materijali

Armatura: Kovani nehrđajući čelik

Postolje: Tlačno lijevani aluminij

Raspor: Nehrđajući čelik

Zaštita: ME (PC na zahtjev)

Oblike zaštite

Vrsta: Cilindričan

Izvedba zaštite

Vrsta: Prozirno

Odabir: Difuzno bijelo

Optika

Vrsta: Raspor ili AcuiSens

Maksimalna snaga

VTN/MH (visokotlačna natrijeva žarulja): 150 W

Cosmo: 140 W

AcuiSens: 16 LED @ 800 mA

Montaža

Technical characteristics

Materials

Canopy: Embossed stainless steel

Base: Injected cast aluminium

Louver: Stainless steel

Protection: ME (PC on request)

Protection Shape

Standard: Tubular

Protection Finish

Standard: Transparent

Optional: Diffused white

Optical

Type: Louver or AcuiSens

Maximum Power

HPS/MH (high pressure sodium): 150 W

Cosmo: 140 W

AcuiSens: 16 LED @ 800 mA

Mounting

Danis

Urbane šetnice
Urban promenades



- + Rasklapanje aparature
četvrtinom zakreta
*Control gear dismantling
with 1/4 turn*




- + Raspor od nehrđajućeg čelika za
smanjenje blještanja
*Stainless steel glare reducing
louver*



- + Armatura od kovanog aluminija
za ograničenje svjetlosnog
onečišćenja
*Embossed aluminium canopy to
limit light pollution*

Klasa zaštite 1 i 2

Electrical class 1 and 2

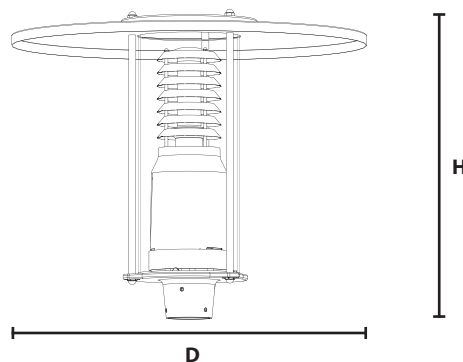

Danis
700

Težina (kg) / Weight (kg) 8.5

Aerodinamicki koeficijent CxS (m²) 0.12
Aerodynamic coefficient CxS (m²)

Stupanj mehaničke zaštite

Protection index

Optička jedinica IP 54 (IP 65 na zahtjev)
Optical unit (IP 65 on request)

Električno kućište IP 54 (IP 65 na zahtjev)
Electrical compartment (IP 65 on request)

Otpornost na udar IK 08
Shock resistance

Dimenzije (mm)
Size (mm)

D **H**
700 590

